



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

H04Q 11/00, H04L 29/06

A2

(11) International Publication Number:

WO 00/08890 ✓

(43) International Publication Date:

17 February 2000 (17.02.00)

(21) International Application Number: PCT/FI99/00652

(22) International Filing Date: 5 August 1999 (05.08.99)

(30) Priority Data:

981708

6 August 1998 (06.08.98)

FI

(71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): AALTO, Mika [FI/FI]; Kiskottajankuja 3 F 48, FIN-02660 Espoo (FI). LAKSO, Marja [FI/FI]; Kristianinkatu 11-13 B 40, FIN-00170 Helsinki (FI). NYMAN, Kai [FI/FI]; Kirkkalantie 17, FIN-02660 Espoo (FI).


(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).

(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: INTERNET/INTRANET ACCESS MECHANISM

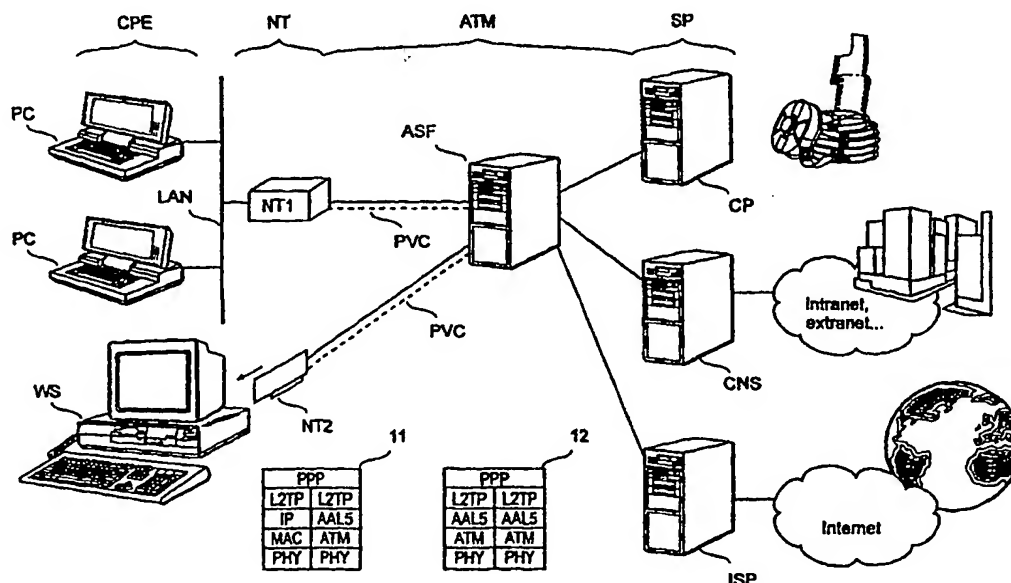

(57) Abstract

A method for connecting one of several customer premises equipment (CPE) via an ATM network to one of several service providers (SP). Each CPE is connected to the ATM network via a corresponding network termination point (NT). There is an access server function (ASF), having a permanent virtual connection (PVC) to each NT and a connection to each SP. A tunnelling protocol is established on the permanent virtual connection between each NT and the ASF. The tunnelling protocol is able to support an integrated signalling protocol. The CPE or its user selects an appropriate SP by using the integrated signalling protocol. Routing from the CPE to the selected SP is performed by the ASF. The ASF connects the CPE to the selected SP using the integrated signalling protocol.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Internet/intranet access mechanism

Background of the invention

The invention relates to a mechanism for accessing the Internet via an ATM (Asynchronous Transfer Mode) network. Within the context of this application, 'Internet' should be interpreted broadly to cover any large-area networks using Internet Protocols (IP). Especially it is the applicant's intention to include future developments, such as Internet 2 or NGI ('Next generation Internet'), and corporate networks, commonly referred to as intranets or extranets.

A person designing an Internet access mechanism faces several issues, such as interoperability, security, billing, economic use of IP addresses, and how to make the best use of installed equipment, etc.

From references [1, Kwok et al.] and [2, Nilsson et al.] are known Internet access mechanisms for connecting each of several customer premises equipment (abbreviated "CPE") via an ATM network to one of several service providers (SP). The concept of service provider comprises Internet service providers (ISP), content providers (CP, for video-on-demand, etc.), and corporate network servers (CNS, for telecommuting, etc.)

Referring to Fig. 1, CPEs are connected to the ATM network at network termination points (NT). A typical NT, such as NT1 in Fig. 1, is a network gateway having a network interface for the customer's local area network, LAN, and another interface towards the ATM network. Alternatively, a personal computer PC or a workstation WS can be connected directly (without a LAN) to the ATM network by means of an ATM/ADSL adapter card (shown as NT2), which in this case is the NT. In both cases, there is a well-defined NT for each CPE (although one NT may serve several CPEs). According to both cited references, the network comprises an access server function, or ASF, having a connection to each NT and each SP such that each NT has a permanent connection or a permanent virtual connection to the ASF. The wording 'access server function' implies that the ASF can be a dedicated network element or it can be integrated into or co-located with another network element, such as an ATM switch. In the cited references, the ASF has been referred to as an 'access node'/'DSLAM' (digital subscriber line access multiplexer) or an 'edge router'. It should be noted that the difference between 'permanent connection' and 'permanent virtual connection' has become rather blurred and later in this application, only 'permanent virtual connection' (PVC) will be used.

A problem of the known Internet access mechanisms is that they do not give a satisfactory answer to following problem: How can a specific end-user be connected to the desired service provider with a minimal number of permanent virtual circuits (PVCs) with a possibility of end-user authentication taking place only at the ends of the PVCs (not necessarily at the ASF)?

Disclosure of the invention

An object of the invention is to solve or at least minimise the problem associated with the prior art access mechanisms. The object is achieved with a method and equipment which are characterized by what is disclosed in the attached independent claims. Preferred embodiments of the invention are disclosed in the attached dependent claims.

The invention is based on establishing a tunnelling protocol on the permanent virtual connection between each CPE or NT and the ASF, wherein the tunnelling protocol is able to support an integrated signalling protocol. Selecting an appropriate SP is based on the integrated signalling protocol. Routing to the selected SP is performed by the ASF. Finally, the ASF connects the CPE or NT to the selected SP using the integrated signalling protocol.

Within the context of this application, 'tunnelling protocol' refers to a protocol which allows creating and maintaining virtual private sessions via various network media such as IP, ATM, Frame Relay, etc. Correspondingly, 'integrated signalling protocol' (i.e. a signalling protocol integrated into the tunnelling protocol) refers to a control protocol which is used for creating, maintaining and releasing these sessions.

Implementation of the invention, however, raises two new issues: the ATM network must provide non-ATM functions in the ASF, and, unless properly dimensioned, the ASF can be a performance bottleneck. Such non-ATM functions performed by the ASF include functions above the ATM layer for the user connections, namely SAR/AAL5, the entire tunnelling protocol and selecting the SP by L2 signalling. These functions require appropriate administration. After a careful study of the pros and cons of the invention, it will be observed that there are situations where the advantages of the invention justify the added complexity of the ASF.

According to a preferred embodiment of the invention, one permanent virtual connection PVC is provided from the ASF to each SP. Alternatively, there is provided a pool of permanent virtual connections from the ASF to each SP. One PVC is allocated to each CPE from this pool. As a further op-

tion, it is possible to establish one switched virtual connection (SVC) from the ASF to each SP, on the basis of signalling which the ASF receives from the CPE via the tunnelling protocol.

- 5 The tunnelling protocol can be established only in response to detecting appropriate user activity in a CPE. Alternatively, the tunnelling protocol can be permanent and the integrated signalling is initiated and the user is authenticated only in response to detecting appropriate user activity in the CPE. According to a further preferred embodiment, the user is authenticated twice, first by the ASF using the tunnelling protocol, and then by the SP.

10 **Brief description of the drawings**

The invention will be described in more detail by means of preferred embodiments with reference to the appended drawing in which:

Fig. 1 is a block diagram illustrating the Internet/intranet access mechanism according to the invention.

15 **Detailed description of the invention**

- Fig. 1 a is block diagram comprising several customer premises equipment CPE, connected via network termination points NT to an access server function ASF according to the invention. The ASF can be a dedicated network element, or it can be integrated into or co-located with another network element, such as an ATM switch (which is known to a skilled person and not shown separately).

- 20 The ASF provides access from each CPE to several service providers SP, such as Internet service providers ISP, content providers CP and corporate networks CN. The invention requires no changes to the construction or operation of the SP equipment. Instead, the invention can be implemented in the ASF and the NT. There is preferably one permanent virtual connection (PVC) between each NT and the ASF.

- 30 In the embodiment shown in Fig. 1, there is one PVC from NT2 (in the workstation WS) to the ASF. Also, assuming that at least one of the personal computers PC is active, there is also a PVC from NT1 to the ASF. All the personal computers PC connected to the LAN share the PVC between NT1 and the ASF. According to a preferred embodiment of the invention, there is a tunnelling protocol, such as L2TP (Layer 2 Tunnelling Protocol), on the PVC from each active PC to the NT. The tunnelling protocol combines the sessions and signalling from all active PCs into a single tunnel from the NT to the ASF.
- 35

The tunnelling protocol must be able to support an integrated signalling protocol. The end user (i.e. the person using the CPE or a software agent being executed in the CPE) selects an appropriate SP by using the integrated signalling protocol. Routing to the selected SP is performed by the ASF. Finally,
5 the ASF connects the CPE or NT to the selected SP using the integrated signalling protocol.

Reference 11 points to a preferred protocol stack at the NT and reference 12 points to a preferred protocol stack at the ASF. (The workstation WS connected to NT2 without a LAN needs a simpler protocol stack, consisting only of the right half of the protocol stack 11, i.e. PPP, L2TP, AAL5, ATM,
10 and PHY.) Having point-to-point connectivity PPP over L2TP provides end-to-end security. In other words, it is not necessary for the ASF to authenticate the user, although the ATM operator may still choose to do so, in order to charge the subscriber for the duration of the session. However, even in this case, the
15 end-user's choice of SP is not known to the ATM operator, which is a clear benefit to the owners of the SPs.

The preferred embodiment saves a considerable amount of PVCs over the prior art access mechanisms. Let us calculate an example case of 10 000 customers and 8 SPs and 20 ASFs (one ASF per 500 CPE). If all customers need access to all SPs, the prior art access mechanisms require a
20 separate PVC for each customer/SP combination, i.e. in this example $8 * 10\,000 = 80\,000$ PVCs. In comparison, the mechanism according to the invention requires a PVC only for each customer and each ASF/SP combination, i.e. $10\,000 + 8 * 20 = 10\,160$ PVCs. (This number is not perfectly accurate since
25 some ASF/SP connections can be switched virtual connections, SVC.)

According to an alternative embodiment of the invention, there is a separate PVC from each active PC between the NT and the ASF. In this case, implementation of the NT is easier because the tunnels from the PCs do not have to be combined (instead, all tunnels pass from the PCs, over the LAN,
30 through the NT to the ASF).

The ATM operator's billing can be based on the time there is a PVC between the customer and the ASF. The invention simplifies this kind of billing because there is only one PVC from each customer. Also, when the customer changes the SP, a new PVC configuration is not needed.

35 Configuring and managing the NT device according to the invention, like the device itself, is rather simple. Only its LAN interface and its ATM

interface require configuration: an IP address, a subnet mask and an ATM PVC. The latter can be received automatically, using a technique known as ILMI (Interim Local Management Interface) as defined by ATM Forum UNI (User to Network Interface) 3.1. ILMI supports bidirectional exchange of management information between UNI management entities related to the ATM layer and physical layer parameters. Correspondingly, the LAN interface can be configured automatically by a process known as DHCP (Dynamic Host Configuration Protocol), as defined by the Internet Software Consortium.

The description only illustrates preferred embodiments of the invention. The invention is not, however, limited to these examples, but it may vary within the scope of the appended claims.

References:

1. Kwok, Timothy et al: *An Interoperable End-to-End Broadband Service Architecture over ASDL Systems*, version 1.0, 3 June, 1997, available at address <http://www.3com.com/xdsl/microwt.html> at the priority date of this application.

2. Nilsson, Patrik et al: *Anx -- High-speed Internet Access*, available at address http://www.ericsson.com/Review/er1b_98/art4/art4.html at the priority date of this application. The www address implies that reference 2 was printed in Ericsson Review magazine.

Both cited references are incorporated herein by reference.

Claims

1. A method for connecting one of several customer premises equipment, or CPE, via an ATM network to one of several service providers, or SPs, said method comprising:

5 connecting each CPE to the ATM network via a corresponding network termination point, or NT; and

 forming an access server function, or ASF, having a permanent virtual connection to each NT and a connection to each SP;

 c h a r a c t e r i z e d i n t h a t

10 a tunnelling protocol is established on said permanent virtual connection between each NT and said ASF, said tunnelling protocol being able to support an integrated signalling protocol;

 the CPE or its user selects an appropriate SP by using said integrated signalling protocol;

15 routing from said CPE to said selected SP is performed by said ASF; and

 said ASF connects the CPE to the selected SP using said integrated signalling protocol.

20 2. A method according to claim 1, c h a r a c t e r i z e d by providing one permanent virtual connection from the ASF to each SP.

 3. A method according to claim 1, c h a r a c t e r i z e d by providing a pool of permanent virtual connections from the ASF to each SP; and allocating one connection to each NT from said pool.

25 4. A method according to claim 1, c h a r a c t e r i z e d by establishing one switched virtual connection (SVC) from the ASF to each SP, on the basis of signalling which the ASF receives from said CPE via said tunnelling protocol.

30 5. A method according to claim 1, c h a r a c t e r i z e d by establishing said tunnelling protocol only in response to detecting appropriate activity in said CPE.

 6. A method according to claim 1, c h a r a c t e r i z e d by establishing said tunnelling protocol permanently and initiating said integrated sig-

nalling and authenticating the user of said CPE only in response to detecting appropriate activity in said CPE.

7. A method according to claim 1, characterized by authenticating the user of said CPE both by said ASF and by the selected SP.

5 8. A network element (ASF) providing an access server function for connecting each of several customer premises equipment, or CPE, via an ATM network to one of several service providers, or SPs, said network element comprising:

10 interface means to several network termination points, or NTs for connecting each CPE to the ATM network via a corresponding NT; and

interface means to each SP for providing a permanent virtual connection or a switched virtual connection thereto;

15 characterized in that the network element is arranged to: use a tunnelling protocol on said permanent virtual connection between itself and each NT, said tunnelling protocol being able to support an integrated signalling protocol;

select an appropriate SP in response to signalling from each CPE or its user, said selecting being carried out using said integrated signalling protocol;

20 support routing from each CPE to said selected SP; and connect each CPE to the selected SP using said integrated signalling protocol.

25 9. A network element (ASF) according to claim 8, characterized in that it is arranged to provide one permanent virtual connection from itself to substantially each SP.

10. A network element (ASF) according to claim 8, characterized in that it is arranged to provide a pool of permanent virtual connections from itself to each SP and to allocate one connection to each active NT from said pool.

30 11. A network element (ASF) according to claim 8, characterized in that it is arranged to provide a switched virtual connection from itself to at least one SP.


12. A network element (ASF) according to claim 8, characterized in that it is arranged to provide a separate tunnel from itself to substantially each CPE.

13. A network element (ASF) according to claim 8, characterized in that it is arranged to cooperate with an NT between itself and each CPE,

said NT being arranged to provide a separate tunnel from itself to substantially each CPE and to combine the separate tunnel into fewer tunnels, preferably a single tunnel, from itself to the ASF.

Fig. 1

1/1

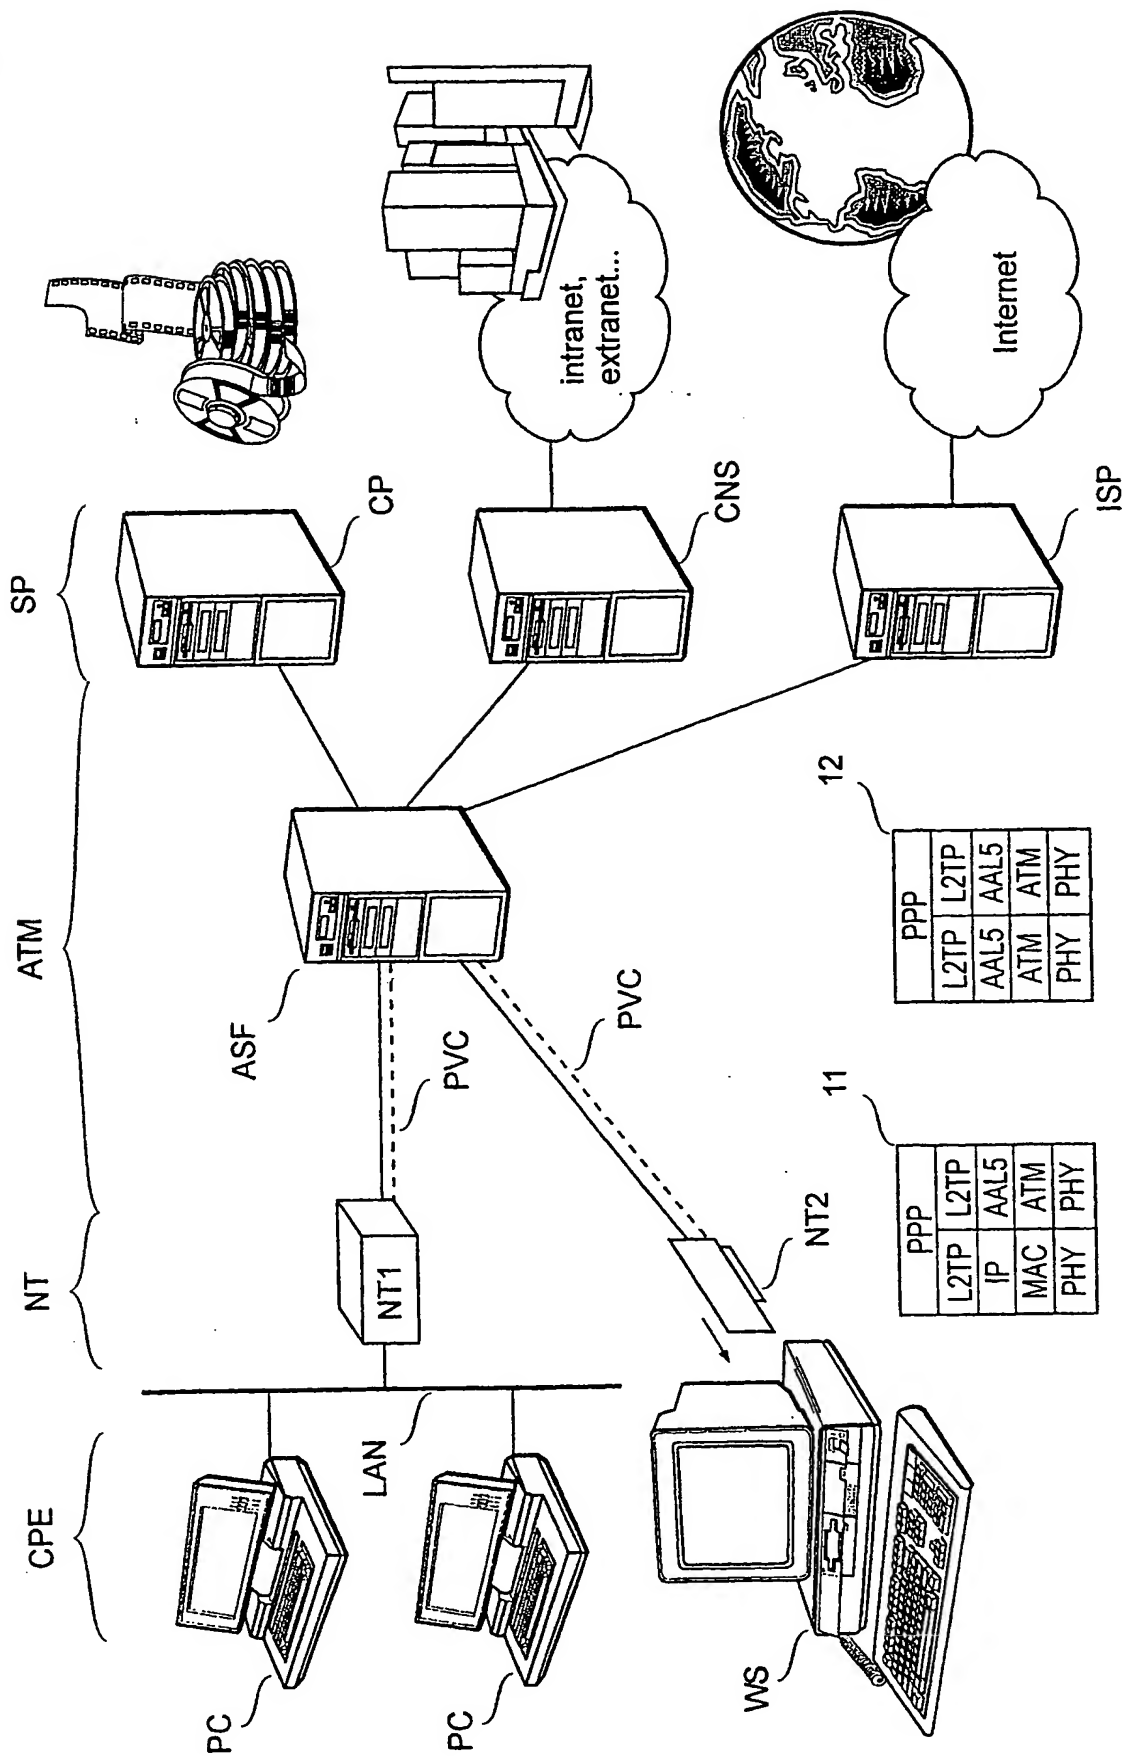



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁷ :

H04Q 11/04

A3

(11) International Publication Number:

WO 00/08890

(43) International Publication Date:

17 February 2000 (17.02.00)

(21) International Application Number: PCT/FI99/00652

(22) International Filing Date: 5 August 1999 (05.08.99)

(30) Priority Data:

981708

6 August 1998 (06.08.98)

FI

(71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): AALTO, Mika [FI/FI]; Kiskottajankuja 3 F 48, FIN-02660 Espoo (FI). LAKSO, Marja [FI/FI]; Kristianinkatu 11-13 B 40, FIN-00170 Helsinki (FI). NYMAN, Kai [FI/FI]; Kirkkalantie 17, FIN-02660 Espoo (FI).

(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).

(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(88) Date of publication of the international search report:

30 March 2000 (30.03.00)

(54) Title: INTERNET/INTRANET ACCESS MECHANISM

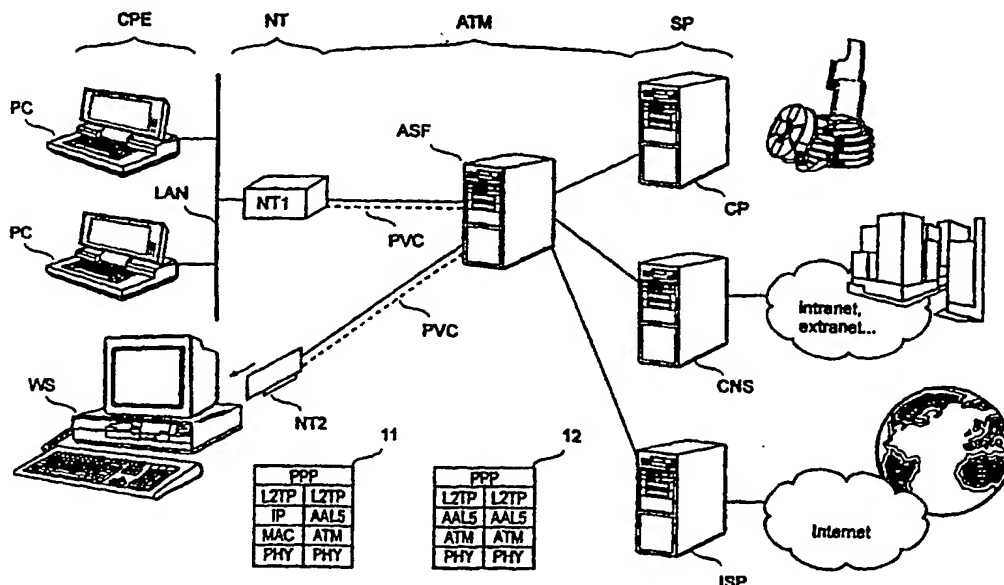

(57) Abstract

A method for connecting one of several customer premises equipment (CPE) via an ATM network to one of several service providers (SP). Each CPE is connected to the ATM network via a corresponding network termination point (NT). There is an access server function (ASF), having a permanent virtual connection (PVC) to each NT and a connection to each SP. A tunnelling protocol is established on the permanent virtual connection between each NT and the ASF. The tunnelling protocol is able to support an integrated signalling protocol. The CPE or its user selects an appropriate SP by using the integrated signalling protocol. Routing from the CPE to the selected SP is performed by the ASF. The ASF connects the CPE to the selected SP using the integrated signalling protocol.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00652

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 11/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0700231 A2 (AT&T CORP.), 15 August 1995 (15.08.95), column 3, line 12 - line 52 --	1-13
Y	Ericsson Review, Volume 1b, 1998, Patrik Nilsson et al, "ANx-High-speed Internet access", see whole document --	1-13
A	Alcatel Telecommunications Review, Volume 4, 1997, W. Verbiest, "HIGH SPEED INTERNET ACCESS OVER ADSL: MAKING IT HAPPEN", see whole document --	1-13

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

Date of mailing of the international search report

21 January 2000

01-02-2000

Name and mailing address of the ISA/

Authorized officer

Swedish Patent Office

Måns Marklund/MN

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00652

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0873038 A2 (ALCATEL ALSTHOM COMPAGNIE GENERALE D'ELECTRICITE), 9 April 1998 (09.04.98), column 6, line 28 - column 7, line 24 --	1,8
A	WO 9836608 A2 (CISCO TECHNOLOGY, INC.), 20 August 1998 (20.08.98), page 6, line 1 - page 7, line 13 --	1,8
A	WO 9638962 A1 (SIEMENS AKTIENGESELLSCHAFT), 5 December 1996 (05.12.96), page 13, line 32 - page 14, line 36 -----	1,8

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/FI 99/00652

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0700231 A2	15/08/95	CN 1122979 A JP 8111693 A US 5623605 A	22/05/96 30/04/96 22/04/97
EP 0873038 A2	09/04/98	AU 6070798 A AU 6070898 A AU 6812498 A AU P0610597 D CA 2231039 A CA 2231047 A CA 2231217 A EP 0884925 A JP 11032059 A JP 11041272 A JP 11055330 A WO 9845995 A AU P0643197 D	15/10/98 15/10/98 30/10/98 00/00/00 09/10/98 09/10/98 09/10/98 16/12/98 02/02/99 12/02/99 26/02/99 15/10/98 00/00/00
WO 9836608 A2	20/08/98	AU 6171598 A	08/09/98
WO 9638962 A1	05/12/96	EP 0830776 A JP 11505992 T	25/03/98 25/05/99